



Drum Equipment FOR CORROSIVES

Justrite Drum Vents provide automatic pressure relief.

Justrite Drum Vents have an operating valve that opens at 0.35 bar internal pressure in normal service for automatic pressure relief. Vacuum relief is manual or automatic, depending on the model, and permits 15 or more litres per minute flow through a standard 19 mm tap. All vents include a flame arrester for added safety. FM Approved.

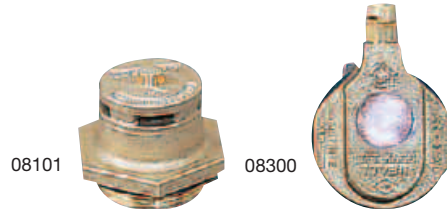

GRAVITATIONAL FLOW METHOD

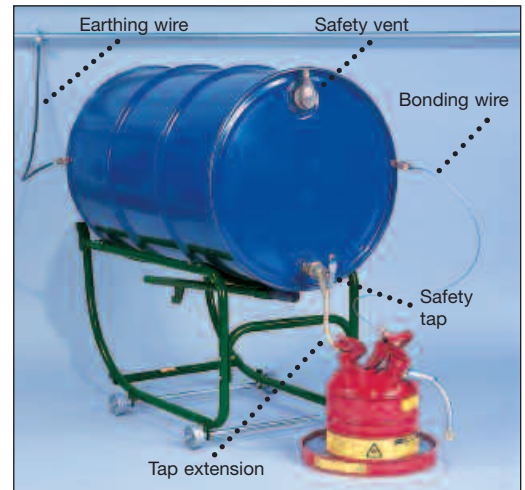

Safety Drum Vents

Description	Vacuum Relief	NPS/NPT	Approv/Lstg Regulation	Model No	Delvr Wt (kg)
Brass vertical vent for petroleum-based applications	Auto	51 mm	FM	08101*	1.0
Brass horizontal vent for petroleum based applications	Manual	51 mm	FM	08300	1.0

* Must be installed in vertical position.



Reduce fire risks from static electricity.


Antistatic Wires prevent sparks from static electricity generated by movement and flow of flammable liquids. Bonding between containers during liquid transfer, and connecting drums to an earth are required by many government and local authority regulations. Standard wire lengths are 1 metre and 3 metres; for longer reach use several wires with 6 mm terminal ends.

Antistatic Wires

Description	End Connections	Model No	Delvr Wt (kg)
Insulated wire, 3 metres coiled	Hand clamp x 6 mm terminal	08497	1.0
Flexible wire, 1 metre	Dual hand clamps	08499	1.0

Easy dispensing with drum taps for horizontal drums.

Justrite Self-Closing Drum Safety Taps incorporate an internal flame arrester which prevents flashback of fire into the drum. Brass construction with a Teflon® seal assures leakproof operation. Adjustable models screw tightly into drum and can be adjusted to dispensing position, with spout downwards, without thread damage or leakage. For trouble-free dispensing of viscous non-corrosive flammables such as adhesives, paint or heavy oils above 2000 SSU (about 30W oil), use Justrite's 51 mm viscous liquid gate valve, Model **08552**. FM Approved.

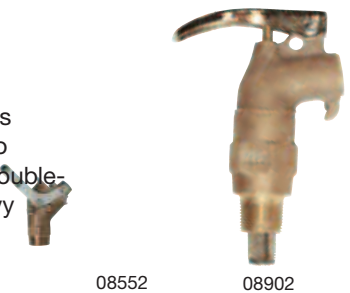

Safety Drum Taps

Description	NPT	Approv/Lstg Regulation	Model No	Delvr Wt (kg)
Brass safety tap, rigid	19 mm	FM	08902	1.0
Brass safety tap, adjustable	19 mm	FM	08910	1.0
Brass control flow lab safety tap	19 mm	FM	08540	1.0
Brass drum gate valve, viscous liquids	51 mm	FM	08552	3.0

Call Your Local Distributor Today!

www.justritemfg.com

